

ViewSonic®
ViewBoard® IFP105S
Interactive Display



ULTRAWIDE SCREEN FOR MICROSOFT TEAMS ROOMS

Immersive Presentations and Better Communications

With a huge 105" touchscreen and 21:9 aspect ratio, the ViewSonic ViewBoard IFP105s interactive display delivers a nearly infinite canvas optimised for team communication and productivity. This ViewBoard display can be securely mounted to any meeting room wall with a wall mount kit. What's more, this ViewBoard interactive display is designed for Microsoft Teams Rooms (MTR) and optimised for Front Row, transforming any room into a collaboration hub for inclusive meetings.

21:9 ASPECT RATIO IDEAL FOR MICROSOFT TEAMS ROOMS

An ultrawide 21:9 aspect ratio delivers more than enough space for digital whiteboard collaboration. Support for Microsoft Teams Rooms and Front Row provides optimal group efficiency and productivity.

INCREDIBLE 5K ULTRA HD RESOLUTION

Native 5120 x 2160 resolution delivers stunning images.

EASY DIGITAL WHITEBOARDING

myViewBoard® digital whiteboarding software delivers a suite of annotation tools to enhance collaboration. In addition, 40-point touch allows multiple users to simultaneously write or draw on the display's surface using styluses or their fingers, or both at the same time.

SIMPLE SCREEN SHARING


ViewBoard Cast™ enables content to be streamed from mobile devices onto the display over wireless or cable networks.

PRODUCTIVITY AND SECURITY

Convenient features such as single sign-on to favourite cloud drives, easy conversion of common office files, QR code sharing, and much more help to boost teamwork with safe and secure content sharing.

AMAZING SUPPORT

Enjoy your new investment with peace of mind with our 5 Year Advance Replacement Warranty.

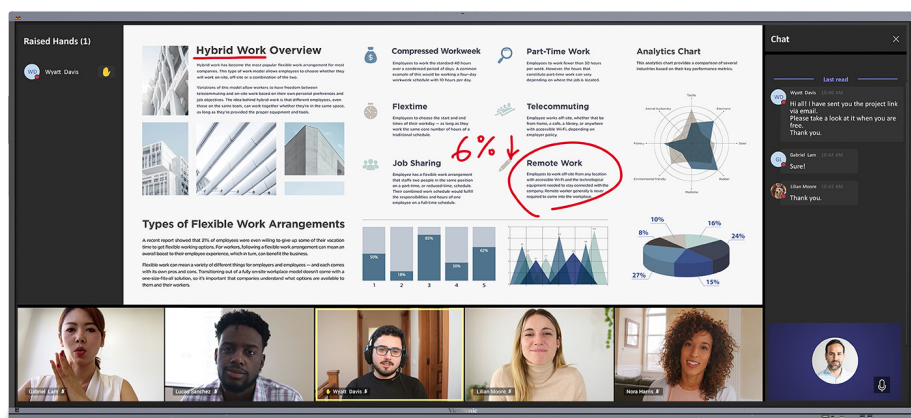

For more information,
contact your ViewSonic representative today.

viewsonic.com/au | +61 (2) 9410 2522 | sales.au@viewsonic.com



IFP1055

Panel	Panel Size	105"
	Type/Tech	TFT LCD Module with DLED Backlight
	Display Area (mm)	2465.92 (H) x 1049.56 (V) (104.6" diagonal)
	Aspect Ratio	21:9
	Native Resolution	WUHD 5120x2160 (Pixels)
	Brightness	400 nits
	Contrast Ratio	5000:1 (DCR enabled)
	Response Time	6.5 ms
	Viewing Angles	H = 178, V = 178
	Backlight Life	30,000 hours
	Surface Treatment	Panel Hard Coating 7H Anti-Glare Glass
	Haze	25 %
	Bezel (L/R/T/B)	19.5/19.5/29.8/41.2
	Orientation	Landscape
Platform	Processor	RK3588 Octa-Core CPU (A76*4 + A55*4)
	RAM	8 GB
	Storage	64 GB eMMC5.0
Touch	Type/Tech	IR Recognition
	Touch Resolution	32767 x 32767
	Touch Points	Windows: 50 Android: 20
	Points of Writing	10
	Response Time	≤ 5 ms
	Scan Rate	≥ 200 HZ
	Accuracy Size	90 % area +/- 1 mm
Input	Pen Tip Size	2 mm/8 mm
	HDMI-In	REAR x3 (HDMI 2.0) / REAR x1 (HDMI 2.1)
	DisplayPort	1
	Audio	1
	RS232	1
Output	OPS	1
	HDMI-Out	1
	Audio	1
LAN	SPDIF	1
	RJ45	2 (10/100/1000M) (USB Type-C 10/100, Android & PC 10/100/1000)
USB	Type-A	7
	Type-B	3
	Type-C	FRONT x1 (1*PD15W + DP1.2 + Data + 10M/100M sharing) REAR x1 [1*PD65W(65W with OPS, 100W without OPS) + DP1.2 + Data + 10M/100M sharing]
Speakers	16W x 2 + 15W 2	
Microphone Array	8 array mic (up to 26 ft)	
Webcam	Camera Plate on Top for Screw-in Webcam Installation	
Embedded OS	ViewBoard OS 13	
Special Features	Smart USB Ports	USB 3.0 "SmartPort USB" to all channels.
	One Click to Cloud Drive	Yes
	Windows Ink	Yes
	Simple LAN Sharing between IFP and Slot-in Device	USB type-C 10/100, Android & PC 10/100/1000
Power	Light sensor	1
	Voltage	100-240VAC +/- 10% Wide Range
Touch	Wall Mount (VESA')	1000 x 400
Operating Conditions	Temperature (° C)	0 °C to 40 °C
	Humidity	20 % - 80 % RH non-condensing
Dimensions (W x H x D)	Physical (inch / mm)	98.71 x 44.49 x 4.06 in / 2507.2 x 1130.1 x 103.2 mm
	Packaging (inch / mm)	105.04 x 11.02 x 51.38 in / 2668 x 280 x 1305 mm
Weight	Net (lb/kg)	201.5 lb/91.4 kg
	Gross (lb/kg)	255.1 lb/115.7 kg
Regulations		VSA: cTUVus, FCC/ICES003, Energy Star8.0, LBL (low blue light filter), FF (flicker free), RoHS, LBL certificate
Package Contents		1. 10-foot power cord 2. Remote control with AAA battery 3. 10-foot touch USB Cable 4. Touch pen x 2 (VB-PEN-008) 5. Quick Start Guide 6. RS232 adapter 7. Clamp x 5 8. Camera plate x 1 (For VB-CAM-201) 9. Screw x 6 (camera*2, wall mount*4) 10. 10-foot HDMI Cable
Compatible Slot-in PC		VPC3 Series

For more information,
contact your ViewSonic representative today.

viewsonic.com/au | +61 (2) 9410 2522 | sales.au@viewsonic.com

