

ViewSonic®

VIEWBOARD

ViewBoard IFP6533


Key Features

- Integrated with myViewBoard software
- Multi-tasking capabilities for enhanced lesson delivery
- Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11



Product Description

The ViewBoard IFP33 Series harmonises a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colours, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

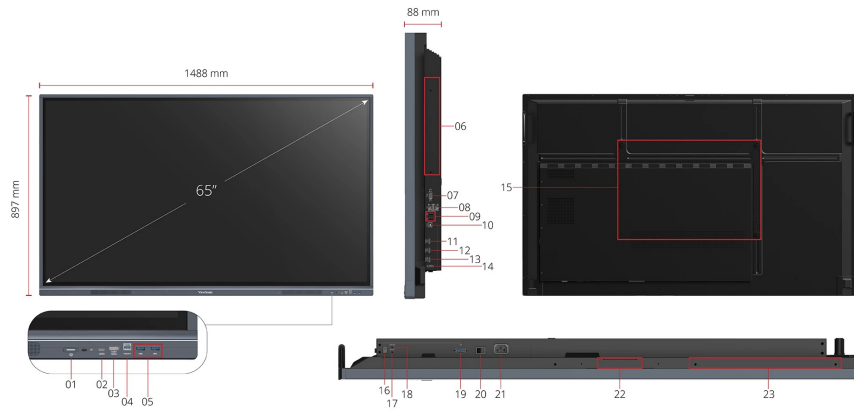

1. POWER ON/OFF
2. USB C
3. HDMI 1
4. TOUCH 1
5. USB 3.0x2
6. OPS Slot
7. RS-232

8. LAN
9. USB 2.0x2
10. TOUCH 2
11. HDMI 2
12. HDMI 3
13. HDMI OUT
14. USB

15. VESA® Wall Mount (600x400mm)
16. SPDIF
17. AUDIO in
18. AUDIO out
19. VGA
20. Power On/OFF
21. AC IN
22. Wi-Fi Slot
23. Sensor Mount

Visit Us

www.viewsonic.com

DISPLAY

Panel Size:	65"
Panel Type:	TFT LCD Module with DLED Backlight. IPS
Display Area (mm):	1428.48(H) x 803.52(V) (64.5" diagonal)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160(Pixels)
Colors:	1.07B colors
Brightness:	450 nits
Contrast Ratio:	5000:1 (max. with DCR enabled)
Response Time:	8ms
Viewing Angles:	H=178, V=178
Backlight Life:	50,000 Hours (8 hours of use per day)
Surface Treatment:	Hardness: 7H Anti-glare coating
Orientation:	Landscape

PLATFORM

Processor:	Quad-core ARM Cortex (A55*4)
RAM:	4GB DDR4
Storage:	32 GB

TOUCH

Type/ Tech:	Ultra Fine Touch Technology
Touch Point:	40 points touch

INPUT

HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)
RGB / VGA:	x1
Audio:	x1
RS232:	x1
OPS:	x1 (Optional Intel Standard OPS)
WiFi:	x1 (Optional VB-WIFI-002/VB-WIFI-004/VSB-050)

OUTPUT

HDMI:	HDMI 2.0 x1
Audio:	x1
SPDIF:	x1

LAN

RJ45:	x2
-------	----

USB

Type A:	USB3.0:Front x2, Rear x2; USB2.0 x1
Type B:	x2 (Rear x1 + Front x1)
Type C:	Front*1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)

EMBEDDED OS

Android 11

BUNDLE SOFTWARE

Basic Annotation Software:	myViewBoard Whiteboard
Pro Annotation Software:	myViewBoard for Windows (Embedded in optional Windows Slot-in PC)
Wireless Presentation:	myViewBoard Display
Wireless Presentation with Touch Feedback: Viewboard Cast:	Yes

SPECIAL FEATURES

All-in-one USB port:	(combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels.
Simple LAN sharing between IFP and slot-in device:	10/100M for Android & Slot-in PC
Light Sensor:	Yes

POWER

Voltage:	100-240V AC
Consumption:	On:99W ; Off: ≤ 0.5W

ERGONOMICS

Wall Mount (VESA®):	600*400
---------------------	---------

OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	1488 x 897 x 88 mm / 58.6 x 35.3 x 3.5 in
Packaging (inch / mm):	1628x208x1005 mm / 64.1x 8.2x 39.6in

WEIGHT

Net (lb / kg):	77.1lb/34.95kg
Gross (lb / kg):	98.5 lb/44.7kg

REGULATIONS

FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI, BIS

PACKAGE CONTENTS

1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m

COMPATIBLE SLOT-IN PC

VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16

16W x 2

TOP CAMERA PLATE

Yes

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.